


Quick Start Guide

SP406

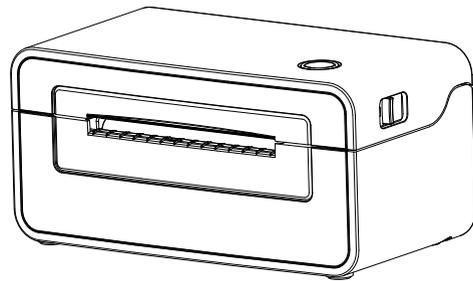

Caution:
This is a Class A product. In a domestic environment this product may cause radio interference in which the user may be required to take adequate measures.


Xiamen Hanin Electronic Technology Co., Ltd.

ADD: No.96, Rongyuan Rd., Tong'an District, Xiamen, China 361100

WEB: www.idprt.com

Packing List

Standard



Printer




Power Cord



CD




USB Cable




Quick Start Guide

Optional



Folding Paper Storage




External Paper Roll Holder


Note: the packing items are actually based on the order.

Appearance and Components


Front View

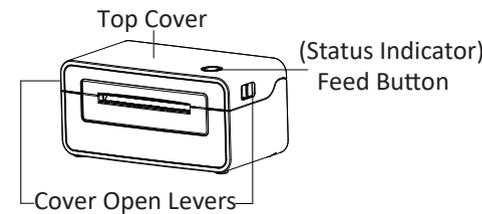

Rear View

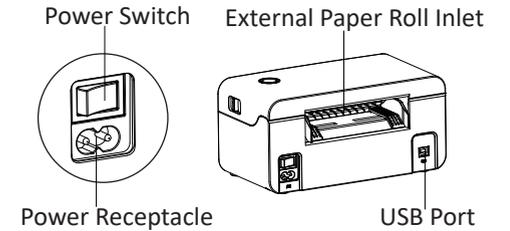


Inside View

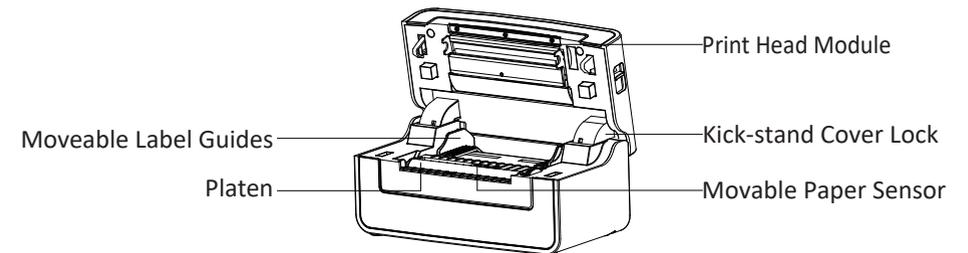

Note: the views above are for your reference. Ports vary by your choice.

Power Connection

1. Make sure the power switch is in "off".
2. Connect the power cord to power receptacle.
3. Connect the other end of power cord to the outlet.

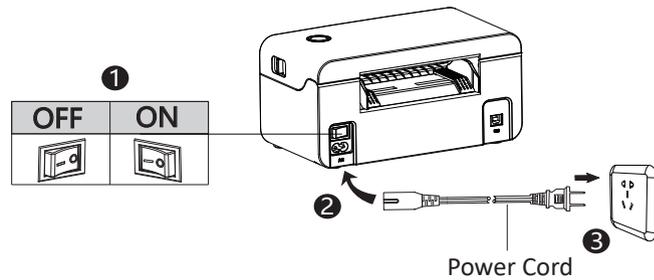


⚠ Note: Please refer to the SP406 User Manual for the utility and driver installation.


Loading the Media

■ Folding Paper Loading


1. Turn the power on, adjust the paper guides to fit the width of paper.




2. Insert the paper into the entry slot.

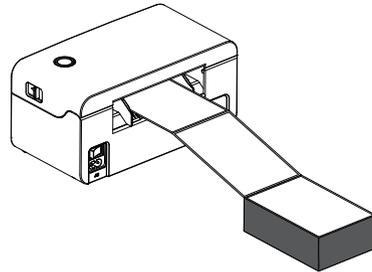

3. The paper will be inhaled into the path automatically.

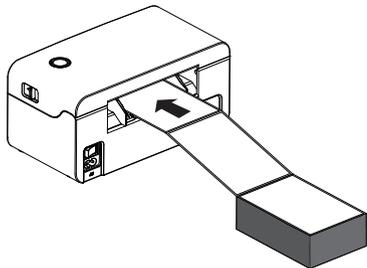

■ External Paper Roll Loading

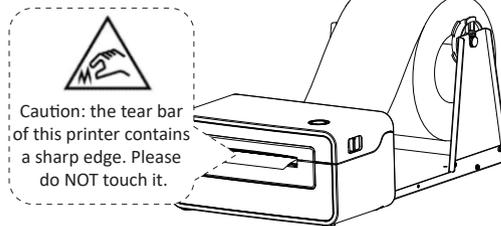

⚠ Note:

1. When the printer power on, the paper will be inhaled into the path automatically.
2. The external paper roll holder needs to be aligned with the hooks at the bottom of the printer.

LED Description

Color	Light	Description
Blue	Always on	The printer is ready
Purple	Always on	The print head is over heat
Red	Always on	The cover is not closed
	Flash slowly	Paper out
Orange	Flash rapidly	Label learning is abnormal
	Always on	The printer is not ready yet
Green	Flash slowly	Paper jam, paper position is abnormal
	Always on	Printing
	Flash rapidly	Printing pause
	Flash rapidly	Receiving data

Feed Button Function

● Feed a label/a line

When printer is in READY status, short press FEED button, it will feed a label or a line, depending on the media you use.

● Print self-test page

When printer is in READY status, press and hold FEED button until the blue indicator light flashes once, then release the button and the printer prints a self-test page.

● Label calibration/learning

When printer is in READY status, press and hold FEED button until the blue indicator light flashes twice, then release the button and the printer starts label learning.

● Pause printing

When printer is in printing, short press FEED button to pause printing or feeding.